

RIDE

SHOCKS™

INST-1000-016

2003-2024 Toyota 4Runner | Shock Installation Guide



Front 2.5 Coilover Shocks

P/N: 525413189

P/N: 525413289

P/N: 525413489

Rear 2.5 Smooth Body Shocks

P/N: 525413589 / P/N: 525413689

P/N: 525413989 / P/N: 525414089

CONTENTS

Page 1:	Introduction
Page 2:	Supplied Parts/Tools
Page 3:	Safety Warnings
Page 4:	Warning (cont)/Warranty/Alignment
Page 5-6:	Front Shock Removal
Page 7-9:	Front Shock Installation
Page 10:	Rear Shock Removal
Page 10-11:	Rear Shock Installation
Page 12:	Setup Information



REV 06.10.24


INTRODUCTION:

Thank you for purchasing Ride Shocks direct replacement shocks. We spent many years perfecting the designs for what we believe are the highest quality and best performing aftermarket shocks for your vehicle. Our unique approach boosts the industry standard for shock technology by offering vehicle and weight range specific shocks. This was ultimately done to provide customers the best ride quality they deserve.

RIDE confidently for years to come knowing your purchase is backed by industry leading expertise and US based sales and service.

Please visit our website at www.rideshocks.com for more information as we are constantly working on new projects. **And don't forget to tag us on social media with pictures of your project @RIDESHOCKS on Instagram.**

GET TO KNOW YOUR RIDE SHOCKS:

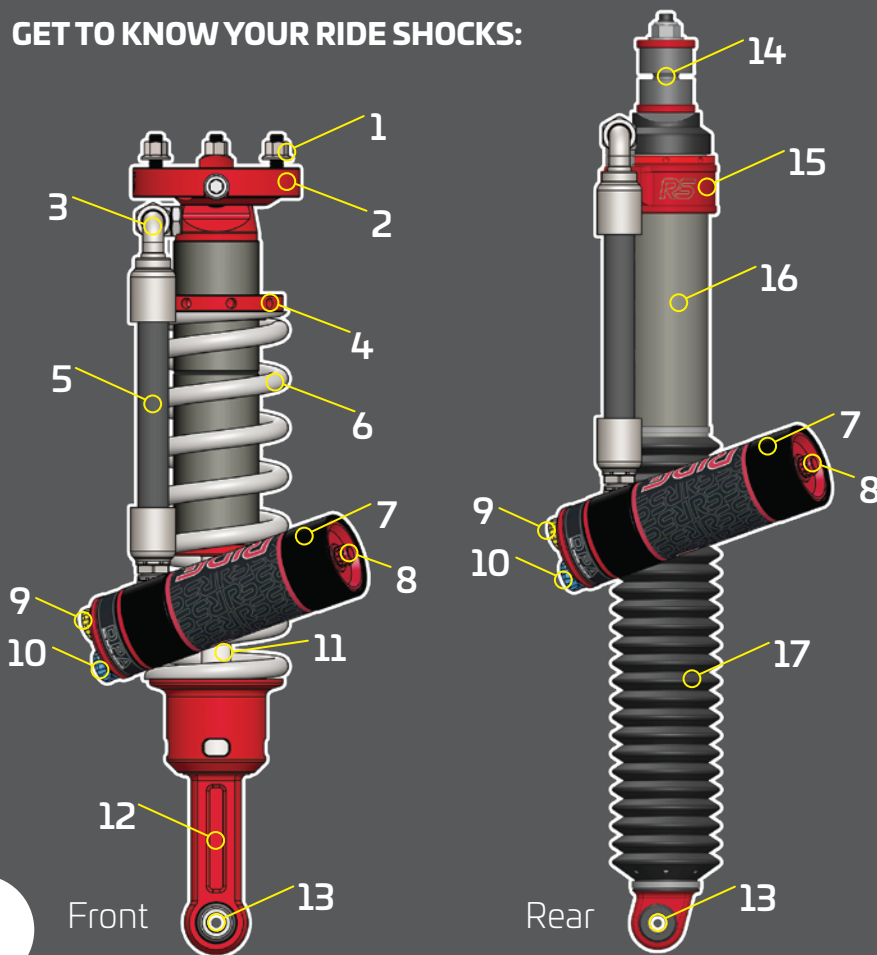

1	TOP HAT BOLTS
2	TOP HAT
3	HOSE FITTING
4	PRELOAD RING
5	HOSE
6	SPRING
7	RESERVOIR
8	SCHRADER VALVE
9	LOW SPEED ADJUSTER
10	HIGH SPEED ADJUSTER
11	SHOCK SHAFT
12	ROD END
13	EYELET
14	TOP STEM
15	RESERVOIR BRIDGE
16	SHOCK BODY
17	SHOCK BOOT

1

Front

Rear

FRONT COILOVERS (included items):



FRONT RESERVOIR MOUNTING KIT

FOR KDSS VEHICLES ONLY



8PCS Self Tapping Screws (3/8" Head, For attaching front reservoir brackets)


FOR 5TH GEN NON-KDSS ONLY

6PCS




Spacers (For skid plate brace, black)

6PCS




M10-1.25mm x 30mm Bolts (For attaching front skid plate brace, Silver Zinc Coated, 17mm Head)




4PCS

3/8"-16 x .63" Bolts (For attaching front sway bar, Gold Zinc Coated, 9/16 Head)



4PCS

M10-1.25mm x 30mm Bolts (For attaching front reservoir brackets, Silver Zinc Coated, 14mm Head)



6PCS

M10-1.50 Flanged Nuts (For coilover top hats, Silver Zinc Coated, 15mm Head)




8PCS

3/8" Washers (Install under all bolts, Gold Zinc Coated)

REAR SHOCKS (included items):




REAR RESERVOIR MOUNTING KIT



4PCS

Self Tapping Screws (3/8" Head, For attaching rear reservoir brackets)

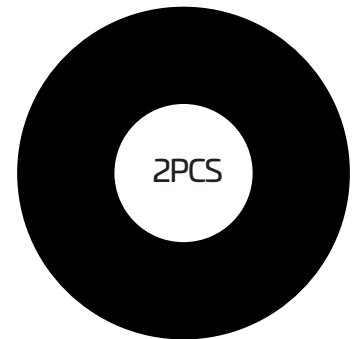

2PCS

40mm Rubber Washers (For Rear Lower Shock Mount)

ITEMS NEEDED:



Tape Measure



Hammer



Screw Driver



Grinder



Safety Glasses



3/8", 9/16", 10, 14, 15, 17, 18, 19mm Sockets



Lug Nut Wrench



Torque Wrench (30-90 ft-lbs)



Spray Paint (Duplicolor - semi-gloss)

A FEW WORDS ON PRODUCT SAFETY AND MESSAGING:

Motor vehicles and off road motor sports/use involve high levels of risks and variables including speed, terrain, overall suspension component choice, driver behavior and other variables outside Ride Shocks knowledge or influence. It follows that Ride Shocks is unable to foresee every combination of variables and these installation instructions do not reflect all product safety information which may be required to reduce risk of accident or injury related to your vehicle and selected modifications.

Before installation, please review the following safety information and installation instructions. Within these Instructions important safety information is generally preceded by one of three signal words indicating the relative risk of injury.



The signal words mean:

⚠️ WARNING A hazardous situation which, if not avoided, could result in death or serious injury. You **CAN** be Killed or Seriously Hurt if you don't follow instructions.

⚠️ CAUTION A hazardous situation which, if not avoided, could result in minor or moderate injury. You **CAN** be moderately HURT and also may suffer property damage if you don't follow instructions.

NOTICE Careful attention is required to this instruction or operation but does generally not relate to personal injury. Damage to your Ride Shocks product or other property may result if you don't follow instructions.

⚠️ WARNING Suspension Modified with Tuned Shock Components/Higher Risk of Roll-over or Other Accident

⚠️ WARNING: HIGHER ROLLOVER RISK		
	Avoid Excessive Speeds, Abrupt Maneuvers, Surfaces/Obstacles Which May Induce a Tripping Moment. All Occupants Buckle UP & USE Supplemental Restraints.	

The suspension of this vehicle has been optimized for off-road utility through installation of Ride Shocks products, which may increase ride height, modify damping/rebound and other suspension parameters. The suspension feel and handling may be different than an unmodified vehicle.

To reduce risk of roll-over or other accident always:

- Routinely inspect suspension components. **IF DAMAGED, DO NOT USE UNTIL REPAIRED OR REPLACED.**
- Do Not modify or substitute components of the Ride Shocks suspension products.
- Use of oversize tire/wheel combinations may increase stopping distances, ride height and/or compromise performance of vehicle stability control and other systems.
- Many states have restrictions on height and suspension modifications for highway use vehicles. Owners & drivers are exclusively responsible for construction and compliance of their vehicles.
- For additional safety messaging consult your OEM owners manual and off road supplements.



WARNING (CA residents) Cancer and Reproductive Harm - www.P65Warnings.ca.gov. Handling passenger or off-highway motor vehicle parts can expose you to chemicals such as phthalates and lead, which can cause cancer and reproductive harm. To minimize exposure, service the vehicle in a well-ventilated area, wear gloves, and wash your hands. For more information see: <https://www.p65warnings.ca.gov/fact-sheets/motor-vehicle-parts>.

Read and follow all instructions and understand all safety messaging before beginning Installation. This installation requires intermediate mechanical skills and should be performed by a professional mechanic with access to a lift and means of securing the vehicle.

WARRANTY:

3 YEAR / 36,000 MILES WORRY-FREE LIMITED WARRANTY

For warranty details please see: www.rideshocks.com/terms-conditions

PRODUCT REGISTRATION:

To register your product, visit: www.rideshocks.com/product-registration

Benefits include:



(scan to register products)

- Information about product updates/valuable safety notices.
- Access to product installation videos/updated installation guides.
- Fast-tracked customer support.
- Option to opt-in to special customer incentives/discounts.

ALIGNMENT:

Arrange for a professional alignment to be done on this vehicle once installation has been completed.

Read all instructions from start to finish before beginning the installation process. Confirm you have all tools necessary to complete the job.

SERVICE:

It is recommended that shocks be serviced with new seal kits and oil after 50,000 miles of street use and 1,000 miles of off-road use.

More information can be found at www.rideshocks.com/service or by calling (619) 810-9740.

FRONT SHOCK REMOVAL: (BOTH KDSS & NON-KDSS)

⚠ WARNING 1. Always use a chassis lift for the installation of shocks, and make certain the raised vehicle is securely attached to the lift to prevent the vehicle from slipping, falling, or moving during the installation process.


2. Remove the front wheels.

3. Remove the 5 bolts and center retaining clip to remove the plastic front panel.

4. Remove 4 bolts holding the front skid plate in place. Carefully set the skid plate and bolts aside for re-assembly later.

NON-KDSS MODELS

5. Remove all 4 bolts holding the front sway bar mounts to the chassis. Do this on both sides to allow for the reservoir brackets to be installed here later (see page 8) and to allow clearance for the rest of the installation.

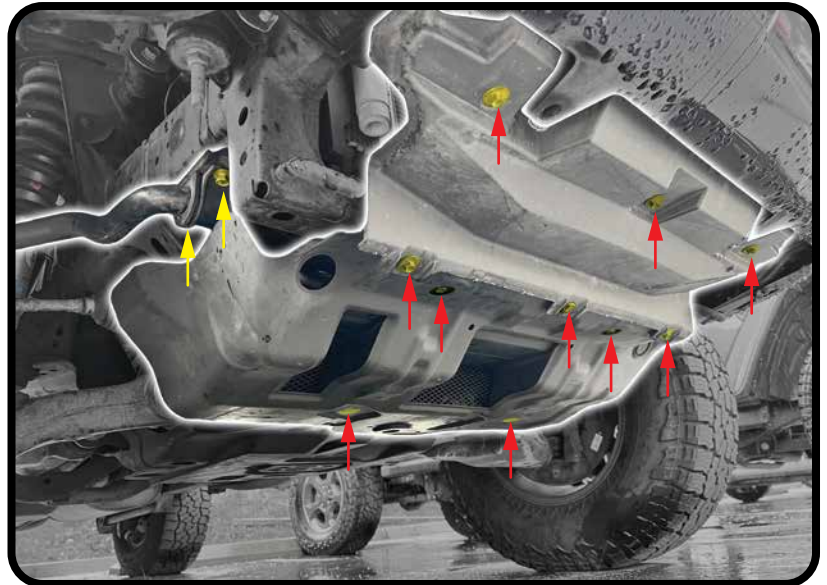

KDSS MODELS ONLY!

Loosen the bolts on the passenger side KDSS stabilizer link using a 17mm wrench. Do not fully disengage these bolts. This will allow you to easily remove the front coilover on the passenger side later.




NOW BEGIN WORKING FROM THE DRIVERS SIDE

NON-KDSS MODELS

7. Remove the nut connecting the sway bar to the spindle. Disconnect the sway bar from the spindle and swing it out of the way for clearance. Loosely place the nut back onto the threads to avoid losing it.

FRONT SHOCK REMOVAL: (BOTH KDSS & NON-KDSS)

8. Remove the bolts holding the ABS wire to the spindle and upper control arm. Remove the cotter pin from the ball joint and loosen the castle nut (do not fully remove). Use a hammer to tap on the spindle to break the tapered ball joint union free. Now fully remove the nut and separate the OEM upper control arm from the spindle.

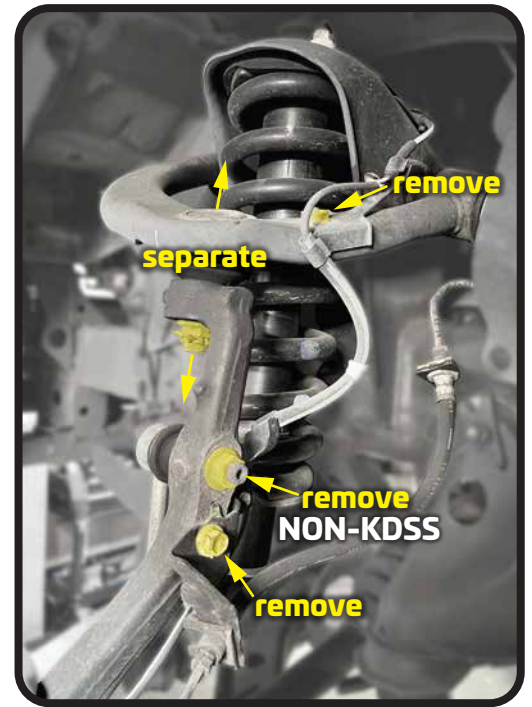

If you do not already have aftermarket upper control arms installed, now would be a good time to install those.

9. Remove the 3 top hat nuts that secure the shock to the frame.

⚠ WARNING **DO NOT** remove the center nut on top. Doing so will result in serious injury or death.



10. Remove the bolt holding the shock to the lower control arm. Set the bolt and nut aside. This will be used later during installation of the new shocks.

11. Now remove the shock assembly from the vehicle. You may need to use a pry bar to move the lower control arm down, in order to get the shock free from the vehicle. Use caution when removing the shocks so that you do not damage any electrical wires or brake lines.



RESERVOIR BRACKET:

KDSS MODELS ONLY!

1. Remove the rubber fender liner in front of the shock, exposing the KDSS lines and bracket. This will allow you to modify this area to fit the reservoir bracket to the frame.


⚠️ WARNING 2. Use gloves and safety glasses. Grind welds on the bracket highlighted in yellow.

Fully remove it from the frame. Test fit the bracket to ensure flush fitment. Clean up the area and prep for paint. Apply a small amount of black paint to help restore the area and prevent rust. After paint has dried, you can put the rubber fender liner back into place.

3. Line the large hole in both brackets up to the circular protrusion in the frame as shown in the image.

Mark the hole locations to pre-drill pilot holes for the bracket to be attached to the side of the frame.

Using a 3/8" socket, attach the mount to the frame with the provided self tapping screws.

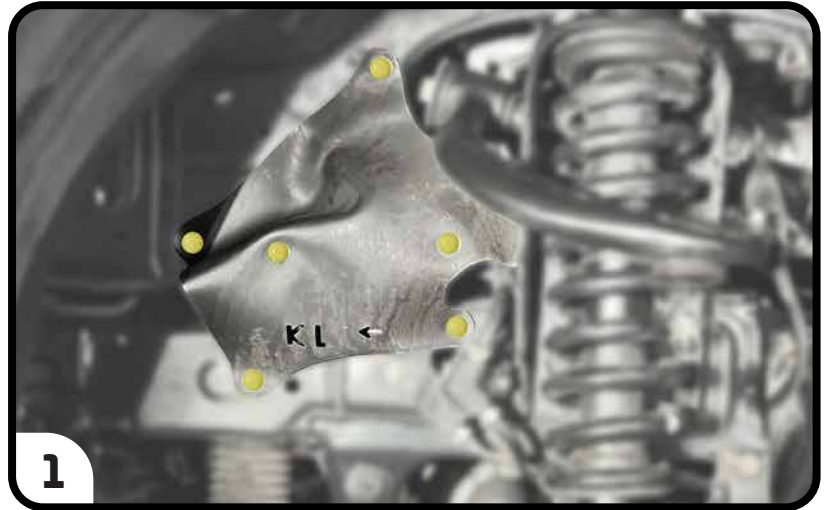

Grind away welds to remove bracket highlighted in yellow

PASSENGER SIDE KDSS BRACKET MOD


⚠️ WARNING

Wear gloves and safety glasses!

Perform modification to the PASSENGER side reservoir bracket in order for it to have the required clearance to be mounted to the frame.



Cut bracket with a grinder to remove material following the cut lines shown. Spray paint the exposed metal edges.

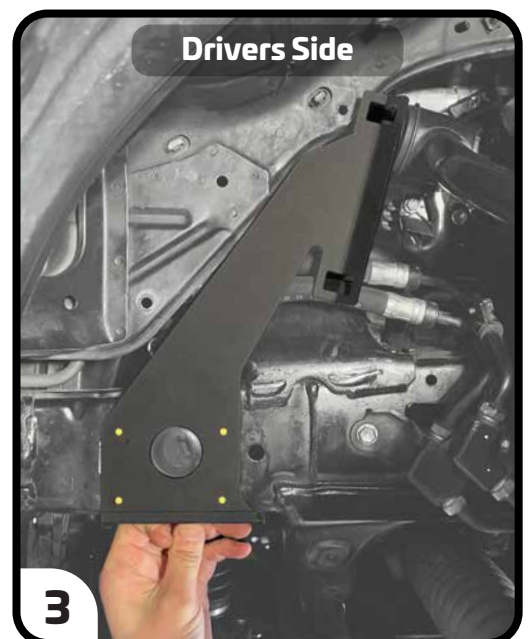

Drivers Side

RESERVOIR BRACKET:

NON-KDSS

1. Install the reservoir mounting bracket in the same place where the sway bar mounts were installed. Add the sway bar relocation spacer, and attach both using the 2pcs (14mm head) silver bolts & (3/8") washers (included).

Torque to 30 ft-lbs using a 14mm socket.

2. Now you can install the sway bar mounts. Use 2pcs (9/16" head) gold zinc bolts & (3/8") washers (included). Insert bolts into the tapped openings on the reservoir mounting bracket base. *Torque to 30 ft-lbs using a 9/16 socket.



FRONT SHOCK INSTALLATION: (BOTH KDSS & NON-KDSS)

1. Install new shock. The shocks are side specific, so be sure the hose orientation points towards the front of the vehicle.


Use caution when setting it into place so that you do not damage any electrical wires or brake lines.

Use the 3pcs (M10-1.50) flanged nuts (included) to secure the top hat to the mounting area.

Torque to 47 ft-lbs using a 15mm socket.

2. Connect the shock to the lower control arm using the stock hardware. You may need to use a pry bar to help push the lower control arm down for clearance.

Torque to 90 ft-lbs.

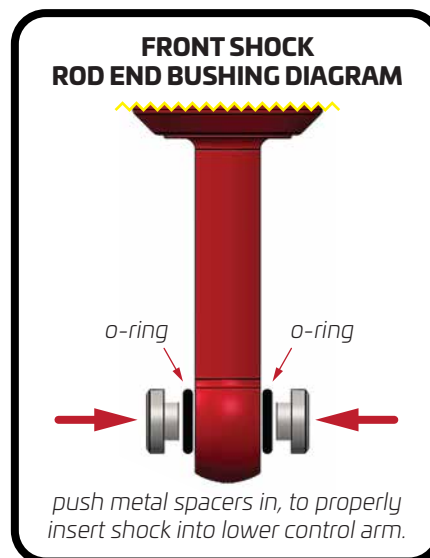

3. Add heat shrink tubing onto all of the 4 hose clamps. Apply heat to shrink the tubing onto the clamps. This is to prevent damage to the finish of your reservoirs when mounting them.

4. Attach the reservoir to the mounting bracket using the prepared hose clamps. Run the clamps behind the mounting ears on the upper portion of the mount. Tighten clamps down so that the reservoir is secure and will not move during use.



ADDITIONAL STEPS:
(BOTH KDSS & NON-KDSS)

- Reconnect UCA to Spindle, torque to 81 ft-lbs, continue to rotate torque wrench until castle nut holes line up. Install cotter pin.
- Reconnect Sway Bar to Spindle. Torque to 52 ft-lbs.
- Reconnect ABS Wire to spindle and UCA. Torque to 17 ft-lbs.




REPEAT PRECEDING STEPS ON THE PASSENGER SIDE

NON-KDSS MODELS - Sway Bar Clearance

Check for sway bar clearance. If there is any interference with the sway bar and the skid plate brace members at full suspension droop, you will need to install the 6 spacers and 6 longer bolts (14mm head *both included).

The spacers will be placed between the braces and the frame. BE SURE to use the 6pcs longer silver bolts during this step.

Torque to 30 ft-lbs.

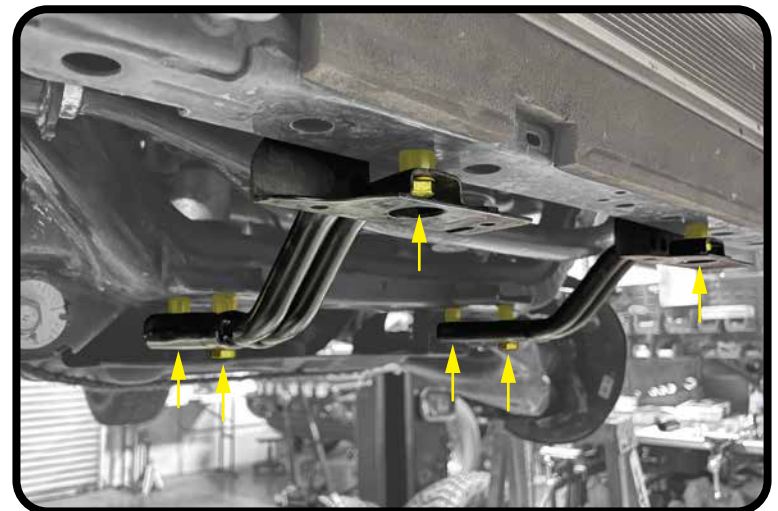

KDSS MODELS ONLY!

- Tighten stabilizer link bracket holding the KDSS bar in place on the passenger side that you loosened earlier. Torque to 30 ft-lbs

FINAL STEPS:
(BOTH KDSS & NON-KDSS)

- Reinstall Skid Plate. Torque all bolts to 21 ft-lbs.
- Reinstall Tires & Lug Nuts (OEM spec torque to 83 ft-lbs)



REAR SHOCK REMOVAL: (KDSS & NON-KDSS)

⚠️ WARNING 1. Always use a chassis lift for the installation of shocks, and make certain the raised vehicle is securely attached to the lift to prevent the vehicle from slipping, falling, or moving during the installation process.

2. Remove the rear wheels and support the axle with a jack to prevent it from sagging and pulling on the brake lines.

3. Remove the top nut holding the rear shock in place with a 17mm socket. Since top nuts are provided, these are not reused.


4. Remove the lower shock bolt with a 17mm socket. Remove the shock from the vehicle. Save this hardware for installation.

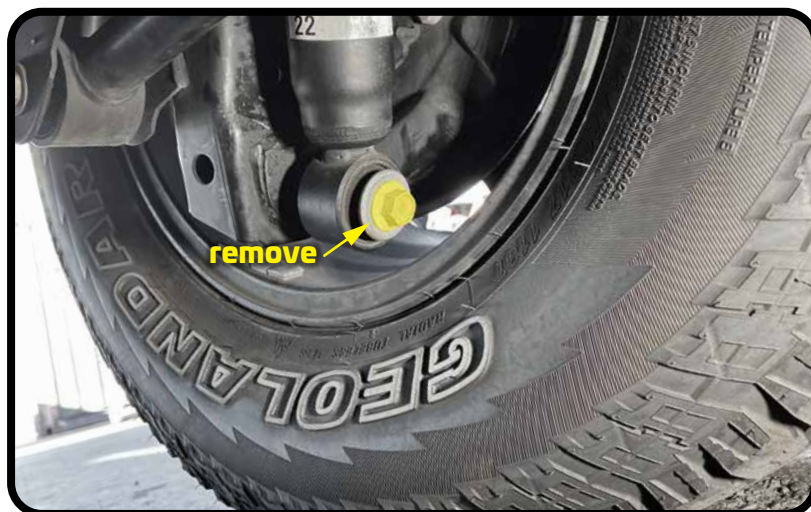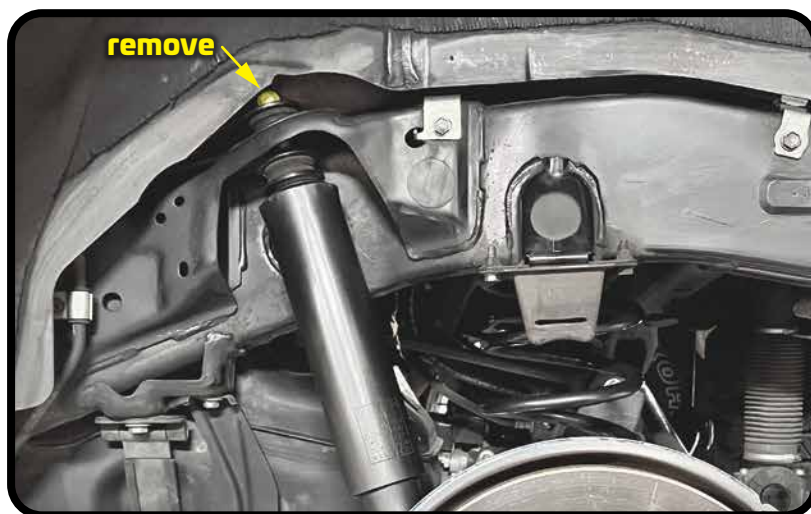


REAR SHOCK INSTALLATION: (KDSS & NON-KDSS)

Be sure to use an appropriate length bump stop to optimize up travel and not to bottom out the rear shocks.

1. Place the black rubber washer (included) onto the lower stud mount. Now slide the shock onto the stud, and fasten re-using the OEM hardware from the disassembly. Tighten to OEM specifications.

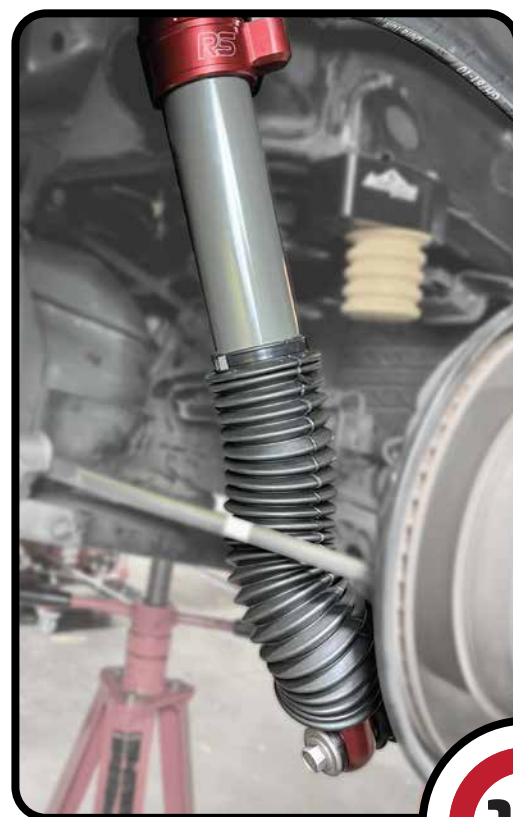

2. Compress the shock and install into upper mount. Tighten upper stem mount nut with 19mm wrench until bushing is flared out to match the outer diameter of the washer. There should be approx 3/8" stud showing above the nut.

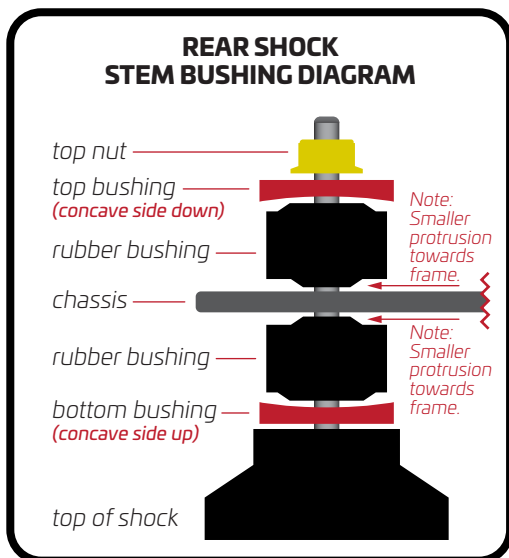

3. Position the reservoir & bracket to the frame and mark where it should be mounted. Use the provided self tapping screws to attach the mount. You may need to pre-drill the holes to make attaching easier. Now you can attach the bracket using the self tapping screws provided.



4. Now you can attach the reservoir to the mount using the hose clamps prepared earlier. Using the same method as before, do not over-tighten.

**REPEAT PRECEDING STEPS
ON THE OPPOSITE SIDE**



FINISHING STEPS:

- Reinstall Tires & Lug Nuts (OEM spec torque to 83 ft-lbs)
- Check Ride Height (see page 12)
- Check All Torque Settings
- Get an Alignment

DUAL PISTON ADJUSTERS (DPA):



Low Speed Adjuster:

What is Low Speed Compression? Low Speed Compression on a shock refers to the speed at which the shaft compresses into the shock body. A smoother, more gradual shock movement. Low speed compression occurs when a vehicle is cornering, braking/accelerating and driving over large rolling bumps.

When would I need to adjust Low Speed Compression? If you find the vehicle is having too much brake dive, feeling too bouncy or bottoming out on big rolling bumps, you should increase the Low Speed Compression on your DPA. Low speed adjustments on the reservoir are less noticeable than high speed adjustments.

High Speed Adjuster:

What is High Speed Compression? High Speed Compression happens when the shock compresses very quickly. High speed compression occurs when hitting things like curbs, speed bumps, larger rocks, or washboard roads at higher speeds (although this is not exclusive to driving speeds). Even at 75 mph approaching a gradual hill is low speed compression, but if you hit a speed bump at just 15 mph, your shock must react very quickly. This is high speed compression.

When would I need to adjust High Speed Compression? If the suspension and tires are slamming through and bottoming out on hard hits you need to increase high speed compression. You should also increase it when adding weight to the vehicle or doing more aggressive offroad driving. High speed compression adjustments are more noticeable and can be the most useful adjustment on the shock.




12-CLICKS OF ADJUSTMENT

Ride Shocks come from the factory with both adjusters all the way decreased (open). This means they are at their softest setting. This allows you to have a full adjustment to increase the firmness of the ride.

Only make adjustments by hand. Using a tool may damage adjusters.

SETUP INFORMATION:

4RUNNER - RIDE HEIGHT

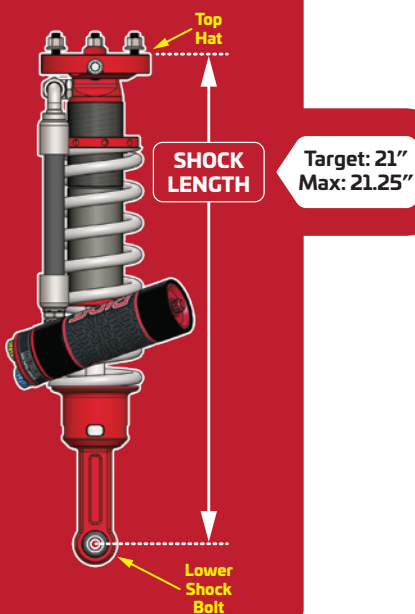

Measuring Your Ride Height


Getting the correct ride height is the first step in setting up your suspension. Pre-load is the initial (pre) tension (load) on your springs before carrying the weight of the vehicle. Each .25" of adjustment you make on the pre-load ring translates to approximately .50" of ride height change.

1. Install shocks. With the vehicle on level ground, ballpark toe setting if necessary, settle suspension (drive back and forth 10 feet).
2. Record height measurement.
3. Adjust pre-load with shocks removed from vehicle.
4. Repeat step 1 and re-check height when complete.
5. Repeat steps above as necessary until ride height is achieved.




- Do not adjust preload with shocks installed on vehicle.
- If you exceed the maximum shock length at ride height, you can damage your shocks.

4RUNNER MAX THREAD MEASUREMENTS

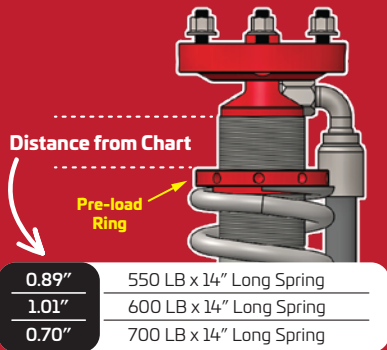


* If you have more than the max thread distance showing at your desired ride height, you may require a heavier rate spring.

4RUNNER REMAINING DOWN TRAVEL

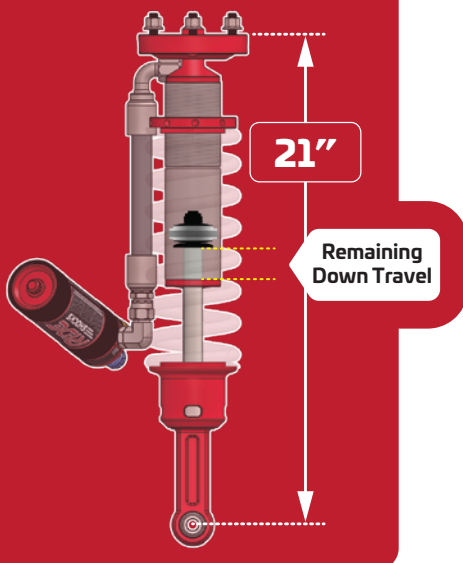

4RUNNER RIDE HEIGHT

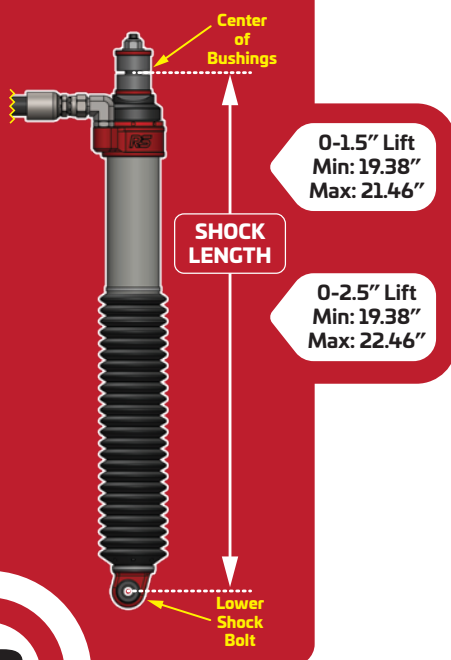

Max Thread Length Above Pre-load Ring

Refer to the chart to correctly find the maximum.

- Never adjust pre-load with shocks on the vehicle.
- Use provided pre-load adjuster tool.
- **DO NOT ADD** additional pre-load past the max listed for your spring.
- Too much thread showing can cause coil bind, which will damage the spring and shock.

Too Much of a Good Thing. Don't Over Do It!

Of course the main objective in adding pre-load is to increase the lift of the vehicle, but there can be a point where you added too much, even if you are still in range of the max exposed threads measurement.

The key is to make sure you still have sufficient down travel remaining when at ride height. Too little and you will run into handling issues and potentially damage suspension components.

Springs work in both extension and compression, so too much pre-load makes the shocks too harsh on compression and can lead to a bumpy ride. We look at suspension as a complete package and every piece of it has a purpose, as every component needs to work together in harmony.

Having too much pre-load could actually be a sign that you need to move up to the next available spring rate.

So after everything is accounted for, it is best to find that happy medium between ride height and ride quality.

Rear Ride Height

Setting rear ride height is something you have very little control over. You're mostly going to be left with the card you're dealt with when it comes to the rear end. Just make sure you're in the Min/Max window and you should be good.


If you do find yourself below the Min measurement, then we suggest looking into alternative coil springs to lift the rear of your 4Runner.

Another thing to note is that Ride Shocks for the rear of the 4Runner has two different lift height versions: 0-1.5" lift and 0-2.5" lift. Do not attempt to run more or less lift than each version is capable of, or you could damage your shocks.

• The measurements point for the rear shocks is between the shock bushings. This is the point on the rear shock where it mounts to the vehicle frame. Take your measurements from the frame down to the lower shock bolt.

• Not all shock manufacturers measure from the same locations, so be sure to double check this when applying this knowledge to any other brands shock.

4RUNNER BUMP STOPS - KDSS DROP BRACKETS - BRAKE LINES

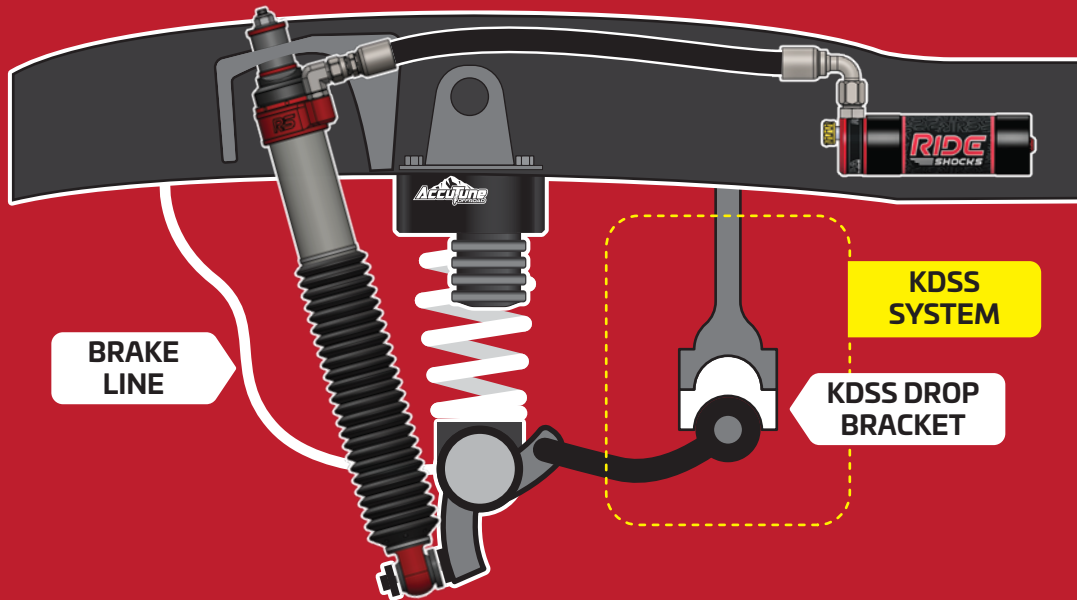

Bump Stops – Money Well Spent

For the rear suspension on your 4Runner, it's important to have the correct length bump stops with your aftermarket shocks coil springs or you will risk damaging your shocks.

We recommend using the AccuTune Offroad Rear Bump Stop Kit to ensure your rear suspension is providing the maximum suspension travel possible.

KDSS Drop Brackets and Brake Lines with 0-2.5" Lift Options

If your KDSS equipped vehicle is using our 0-2.5" lift rear shocks (PN: 525413589 AND 525413689), you will need to install KDSS Drop Brackets to allow for track bar clearance. 1.50" or longer extended brake lines are also required.